

Overview

100% Customer Satisfaction

MaxiFlo™ TURBINE Flowmeter series MT measures liquid, gas and steam with low viscosities with high accuracy.

- Low Cost
- Outstanding Accuracies of 0.2%, 0.5% and 1%
- Bi-directional Flow capacity (optional)
- Various Signal Output options of Pulse and 4-20mA
- Wide application for liquid, gas and steam in the fields of petroleum, chemical industry, metallurgy, etc. for measuring and control

Specifications

Accuracy Liquid: ±0.2%, 0.5% and 1%
 Gas: ±1% (0.5%, Optional)

Medium Temperature Liquid: -20°C ~ +120°C
 Gas: -20°C ~ +60°C

Ambient Temperature Liquid: -20°C ~ +55°C
 Gas: -20°C ~ +50°C

Max. Operating Pressure ≤2.5 Mpa

Power Supply 5~ 24VDC, Battery

Output: 4-20mA, Pulse

Explosion-proof Ex d II B T4

MAXIFLO

**Turbine Flow Meter
 (Series MTL)**

Turbine Flow Meter



Flanged In-line sensor with Indicator



Screw In-line sensor



Insertion sensor

Specifications Table for Liquid Type

DN (mm)	Flow Range (m ³ /h)						Medium Temp. (°C)	Ambient Temp. (°C)	Max. Pressure (MPa)	Pressure Loss (MPa)
	Accuracy 0.2%		Accuracy 0.5%		Accuracy 1.0%					
	Min.	Max.	Min.	Max.	Min.	Max.				
2A	/	/	/	/	0.03	0.16	-20°C ~ +120°C	-20°C ~ +55°C	6.3	0.12
4A	/	/	/	/	0.04	0.25				
6A	/	/	/	/	0.1	0.6				
10A	/	/	/	/	0.2	1.2				
15A	/	/	0.6	4	0.6	6				
25A	/	/	1.6	10	1	10				
40A	3	20	3	20	2	20			2.5	0.025
50A	6	40	6	40	4	40				
80A	16	100	10	100	10	100				
100A	25	160	20	160	20	200				
150A	50	300	40	300	40	400				
200A	/	/	100	600	80	800			1.6/ 2.5	0.025
250A	/	/	160	1000	120	1200				
300A	/	/	260	600	180	1800				

Specifications Table for Gas Type


DN (mm)	Normal Flow Range (Am ³ /h)		Accuracy	Medium Temp. (°C)	Ambient Temp. (°C)	Max. Pressure (MPa)	Pressure Loss (MPa)
	Min.	Max.					
15A	1.5	7.5	2.5%	-20°C ~ +60°C	-20°C ~ +50°C	6.3	0.001
25A	6	42					
40A	8.4	84					
50A	16.8	168					
80A	34	340	1%				
100A	51	510					
150A	98	980					
200A	170	1700					
250A	230	2300					
300A	400	4000					

Specifications Table for Insertion Type

Model	Velocity Range (m/s)		Medium Temp. (°C)	Ambient Temp. (°C)	Max. Pressure (MPa)	Pipe Size (mm)
	Liquid (Accuracy 1%)	Gas (Accuracy 2.5%)				
IS800	0.3 ~ 3.5	5 ~ 50	-20°C ~ +120°C	-25°C ~ +55°C	1.6	50 ~ 800
IS2000	0.3 ~ 3.5	5 ~ 50			1.0	50 ~ 2000

Dimensions of Converters (Flow Indicators)


Pulse Transmitter-No Display
Non-Exproof

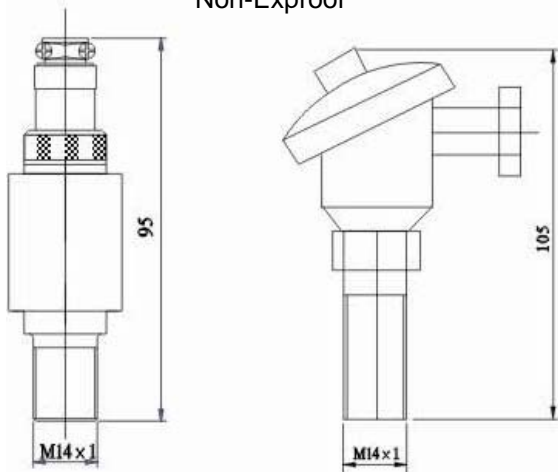


Cables connected by soldering

Cables connected thru terminals


4-20mA & Pulse Transmitter-No Display
Ex-Proof

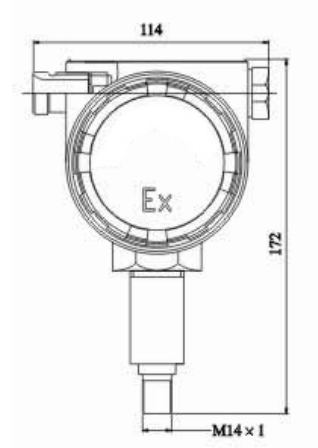

Rate & Total Display
No Signal Output – Battery Powered

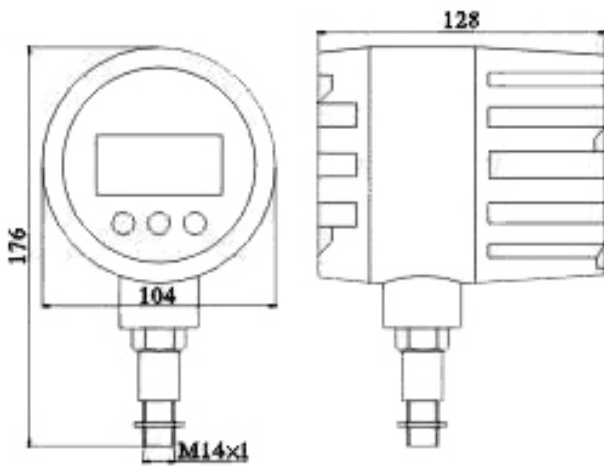


Rate & Total Display
Pulse & 4-20mA Output – 24VDC Powered

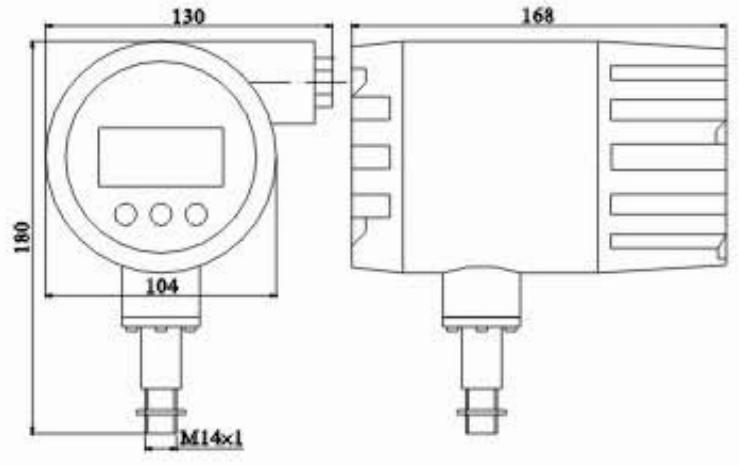

Dimensions of Sensors


Inline Sensors
Screw Connection (DN 2 ~ 25mm)



DN (mm)	Connection	I (mm)	L (mm)	Weight (kg)
4	Screw 3/8"	11	42	0.5
6	Screw 3/8"	11	42	0.5
10	Screw 1/2"	16	55	0.6
15	Screw 1"	18	75	1.0
25	Screw 1-1/4"	23	100	1.5


Inline Sensors
Flange Connection (DN 40 ~ 300mm)

DN (mm)	L (mm)	W (kg)
40	140	7
50	150	8
80	200	10
100	220	12
150	300	16
200	360	19
250	400	73
300	420	85

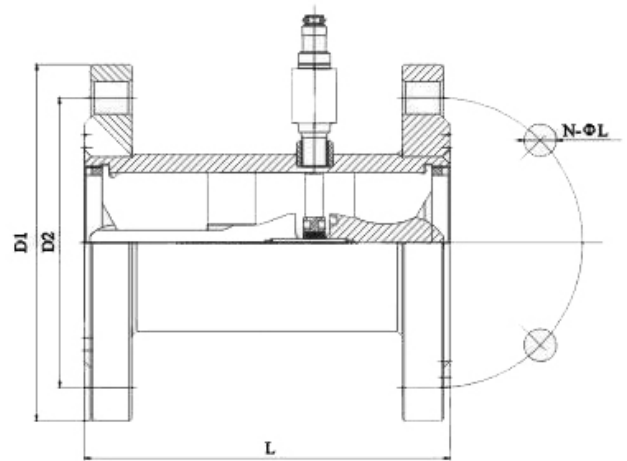


D1, D2, N-ØL and weight can vary according to flange standard required by customer.

Insertion Sensors
(DN 50 ~ 800mm)

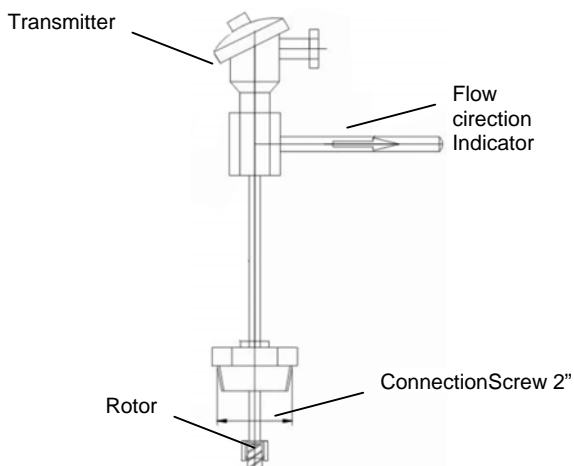

Insertion Sensors
(DN 50 ~ 2000mm)

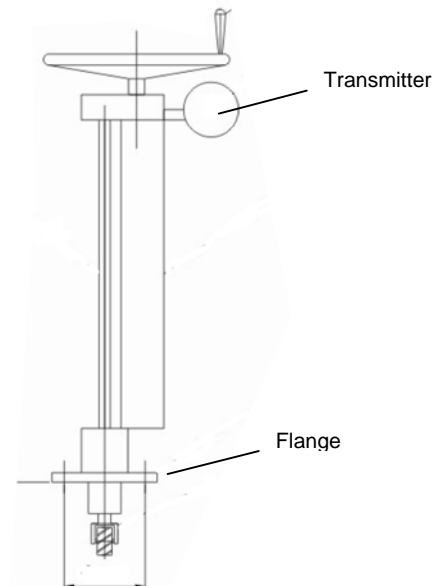

Model Selection Guide

MT#-###-##-#-##-##-##-Options		Code
Medium	Liquid	MTL
	Gas	MTG
DN (mm)		###
Converter/Indicator	No Indicator - Pulse Output Only (Non-Ex-Proof)	T1
	No Indicator - 4-20mA Output Only (Ex-Proof)	T2
	Flow Rate & Total Indicator - No Output (Ex-Proof)	T3
	Flow Rate & Total Indicator – Pulse & 4-20mA Output (Ex-Proof)	T4
Sensor	Inline Sensor	G
	Insertion Sensor	I
Power	24 VDC	P1
	Battery (Lithium Ion - 5 Years)	P2
Connection	Screw (PT, NPT, etc.)	F1
	ANSI 150# Flange	F2
	ANSI 300# Flange	F3
	JIS 10K Flange	F4
	JIS 20K Flange	F5
	DIN Flange	F6
	Sanitary	SA
	Others	_____
Output	No Output	NO
	Pulse Output	PA
	4-20mA	AN
Option	Temperature and Pressure Compensation for Gas	GF

Example: **MT-80-T3-G-P2-F2-NO**: Turbine flowmeter with flanged inline sensor with battery-powered indicator with no output.

Other options may be available. So, please consult with us.

We are here for you

For further information, visit us at

www.maxiflo.co.kr

Seil Enterprise Co.

Seoul Korea
www.maxiflo.co.kr

MAXIFLO™ is a registered trademark of Seil Enterprise Co.