


# 전기식 기화기

## ELECTRIC TYPE VAPORIZER

보기 좋고, 관리하기 쉽고, 확실한 안전장치를 갖춘  
당사가 개발한 고유 모델입니다.

*Looking good Easy to maintain With reliable  
safety equipment Developed by  
Hwa Seong Engineering Co., Ltd.*

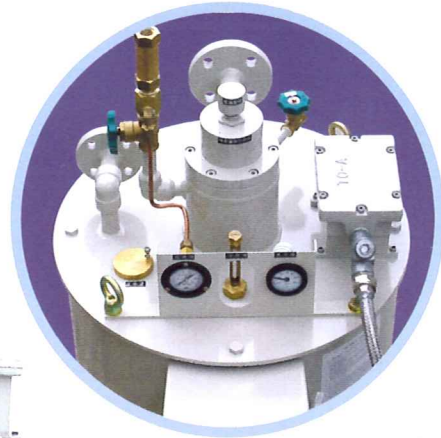

### 안전장치 / Safety equipment


- 액화가스가 넘치지 않는다.(특수 후훗트 이용)
- 액후훗트 수동 복귀장치
- 온수 과열 방지장치
- 저수위 안전장치
- 안전변 설치
- Liquefied gas will not overflow.(with special float)
- Manual return equipment for liquid float
- Preventive equipment for overheating of hot water
- Safety equipment for low water level
- Introduced safety valve

### 편의장치 / Utility

- 물 증발 방지장치
- 편리한 전기배선
- 보온장치(무공해)
- 미려한 외관
- Preventive equipment for water vaporization
- Convenient electric wiring
- Thermal insulation (Pollution-free)
- Beautiful exterior view



### 사양 / SPECIFICATION

DIVISION	LPG SIDE	WATER SIDE
DESIGN PRESSURE	18kg/cm <sup>2</sup>	WATER FULL
DESIGN TEMPERATURE	55°C	100°C
HYDRAULIC TEST PRESSURE	30kg/cm <sup>2</sup>	-
PNEUMATIC TEST PRESSURE	18kg/cm <sup>2</sup>	-
SAFETY V/V SETTING PRESSURE	18kg/cm <sup>2</sup>	-
OPERATING TEMPERATURE	55°C	60 ± 5°C


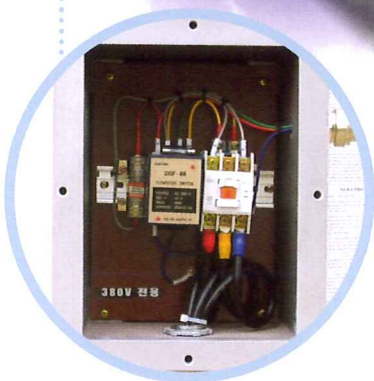


# TEVA

## TEV - VN

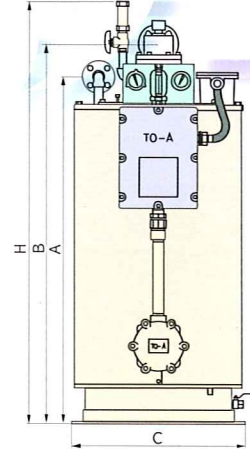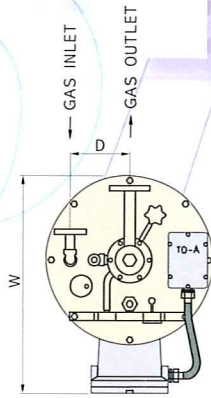

## TEV

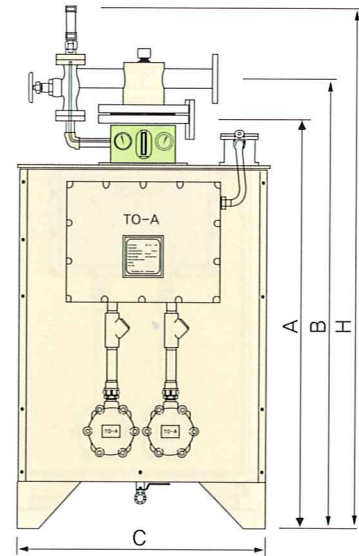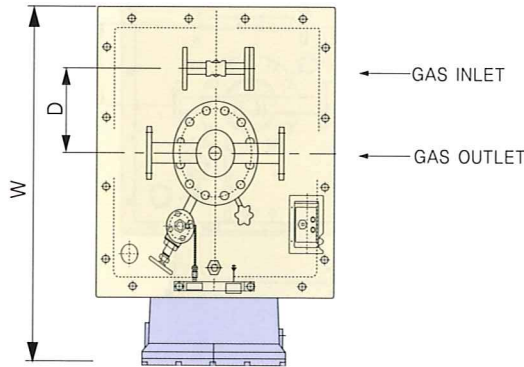

### 규격 / DIMENSION

형식 MODEL	기화 능력 CAPACITY(kg/hr)	히타용량 HEATER CAPACITY(kw)	제품 치수 / DIMENSION (mm)							입구 INLET	출구 OUTLET	공중량 EMPTY WEIGHT	물용량 WATER CAPACITY	겨울철 부동액(-20℃) ANTI FREEZE
			A	B	C	D	H	W						
TEV - VN30	30	5	868	968	460	155	1150	610	20A	20A	100 kg	50 ℓ	15 ℓ	
TEV - VN50	50	8	968	1068	460	155	1250	610	20A	20A	110 kg	55 ℓ	16.5 ℓ	
TEV - VN100	100	14	1068	1165	540	185	1350	700	20A	25A	145 kg	110 ℓ	33 ℓ	
TEV - VN150	150	21	1218	1318	540	185	1500	700	20A	25A	160 kg	130 ℓ	39 ℓ	
TEV - VN200	200	28	1118	1218	640	235	1400	800	20A	25A	190 kg	170 ℓ	51 ℓ	
TEV - VN300	300	42	1218	1328	640	235	1500	800	20A	40A	220 kg	190 ℓ	57 ℓ	
TEV - 400	400	56	1275	1425	840	250	1654	1061	25A	50A	410 kg	500 ℓ	150 ℓ	
TEV - 500	500	70	1405	1555	840	250	1784	1061	25A	50A	450 kg	560 ℓ	170 ℓ	
TEV - 600	600	84	1535	1685	840	250	1914	1061	25A	50A	480 kg	615 ℓ	185 ℓ	
TEV - 700	700	98	1565	1715	1020	350	1944	1304	40A	50A	590 kg	880 ℓ	260 ℓ	
TEV - 800	800	112	1565	1715	1020	350	1944	1304	40A	50A	640 kg	970 ℓ	290 ℓ	
TEV - 900	900	126	1565	1715	1020	350	1944	1304	40A	50A	685 kg	1050 ℓ	315 ℓ	
TEV - 1000	1000	140	1690	1840	1020	350	2040	1320	40A	50A	720 kg	1050 ℓ	315 ℓ	